

IPLED-32x96-RGB-10-ODN-FS

IPLED-48x144-RGB-6.67-ODN-FS

(Indoor or Outdoor Enclosed)



Pictures shown are of 10 mm Pitch Displays



Available in 6.67 mm or 10 mm displays that can be seen from hundreds of feet away. 6.67 mm models offers more pixels allowing for greater detail. Indoor or outdoor they can be used for multiple purposes: as an information sign, a status sign with real time data or any other need. Thousands of full color bitmaps can be stored on the internal micro SD card. This sign has the same connectivity as our previous model signs and is offered at a lower cost. It is serviceable from the front with a powder coated aluminum case and is substantially lighter in weight.

> Specifications

◆ Internals

10 MM Pitch LEDs: Array 32x96 3072 pixels; full Color, R/G/B
6.67 MM Pitch LEDs: Array 48x144 6912 pixels; full Color, R/G/B
Processor: ARM A8 at 1GHz; Memory: 1GB SDRAM; uSD Memory card: 2GB Min.

◆ Electrical

Ethernet - RJ45 - 10/100Mb Cat5.
USB 2.0 - Host - Type A connector.
Audio - 3.5mm Stereo Jack - 3 conductor.
Case: 1" Knockout opening.
Power Input:
Conduit Cutout.
Wago Lever Nuts

◆ Environmental

Operating Temperature:
-34°C ~65°C ambient.
-30°F ~ 150°F ambient.
Relative Humidity:
upto 90 % non-condensing.
Ethernet Isolation:
1500VAC min per IEEE 802.3.
Enclosure:
PTFE gasketed.
Weather-sealed enclosure.

◆ Power Requirements

Input - 95 ~ 260VAC at 50 ~ 60Hz.
Power Consumption:
50W maximum
20W typical

◆ Mechanicals

Length: 43.25"(1099mm)
Height: 19.75"(502mm)
Depth: 5.875"(149mm)
Weight: 22 lbs est. (93.78kg).

◆ **Remote 'snapshot'**

Not where you can see your display, no problem. View exactly what is on the display no matter where you are. The sign generates an instant copy of what is being displayed and sends it right to your browser.

◆ **Integrated 10/100 Ethernet**

This is the core of our technology which allows for superior ease of use and integration in conjunction with the unit's built in web-server. TCPIP enabled out of the box. Use built-in support for DHCP and NTP to aid in your ease of configuration.



◆ **Data thresholds**

Set thresholds on your data to change your message color or state to bring impact to an event.

◆ **Server-free solution**

With easy web-based interfaces and easy to program XML data structures, no longer do you need middleware or any additional hardware to accumulate data saving you time, money and resources.

Direct PLC Interfaces

Connect to Standard based PLC's including: Ethernet/IP™, Modbus/TCP, Melsec(Mistubishi), FINS (OMRON), and OPC.

◆ **Browser based interface**

Ease of use exemplified. Manage your display from a simple web-browser anywhere - any time. Send messages, check status, and manage thresholds, layouts, remote or local data fields all from web pages hosted on the sign. No software to install and no custom programming needed.

◆ **Live message elements**

Insert data into any message. You can have real-time data and see it update dynamically on the display. Any message may contain static or scrolling text, live data, database elements, clocks, bit-mapped graphics or any combination therein.




◆ **Dynamic sign layouts**

Schedule any number of layouts with our Playlist manager. Show real-time data, statistics, company news, safety information, or general messages in their own unique layout to get the impact you want. The Playlist manager allows you to schedule the times and order - it is all under your control.



◆ **Fonts, graphics and effects**

Use any of the 44 built-in text or graphics fonts to build your message. Add pizzazz using the built-in entry and exit effects.

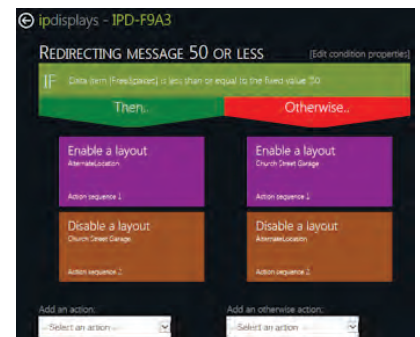

◆ **Conditions/Program Logic**

Program logic can be tied to variables on the sign. As data is changed "Program logic" can be used to Activate/Deactivate Messages, Layouts, Thresholds, Commands or even update other variables on the sign.

◆ **Simple Integration/Open Interface**

Use simple standard XML syntax and constructs to send data to the display. No proprietary protocols, syntaxes, or languages to learn. Any XML capable application like MS Excel or SQL Server or programming language like Perl, VB, or C# can easily update data fields or elements on the sign.